


# KGF-P 2040 BI

*Curved belt conveyor with Center Drive, reversible*

B20.40.020 for 90° curve, B20.40.021 for 180° curve

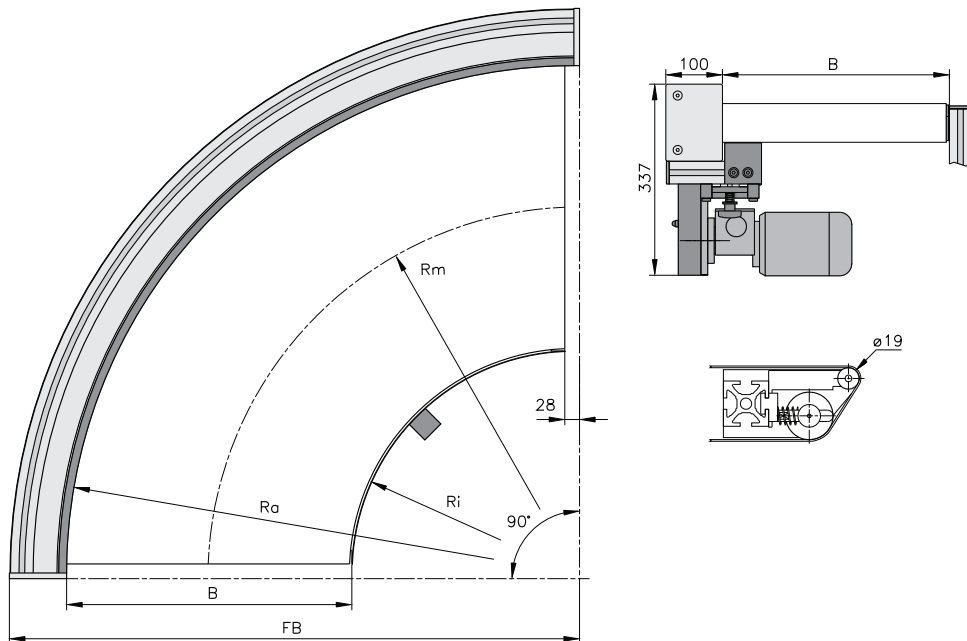


## Features:

For this conveyor mk offers Drive Version BI, featuring usable belt widths of 300, 400, 500 and 600 mm for a 90° curve. The compact construction simplifies the integration of the conveyor within existing lines. The  $\varnothing 55$  mm drive roll ensures good grip and efficient motor power transfer.


Dimensions – Technical Information		Notes
Conveyor Angle	90°	others on request
Usable Widths B	300 at Ra=600 mm, Ri=300 mm, FB=706 400 at Ra=900 mm, Ri=500 mm, FB=1006 500 at Ra=900 mm, Ri=400 mm, FB=1006 600 at Ra=900 mm, Ri=300 mm, FB=1006	Ident.-Nr.: B20.40.023 Ident.-Nr.: B20.40.022 Ident.-Nr.: B20.40.021 Ident.-Nr.: B20.40.020
Drive Location	below, center	
Drive and Speed	5 to 30 m/min in Rm	others on request
Stands	standard, or with belt change support	
Load Capacity max.	to 30 kg (65 lbs), depending on conveyor angle, speed and product	
Belts		see page 76

# KGF-P 2040


Stands and Order Example

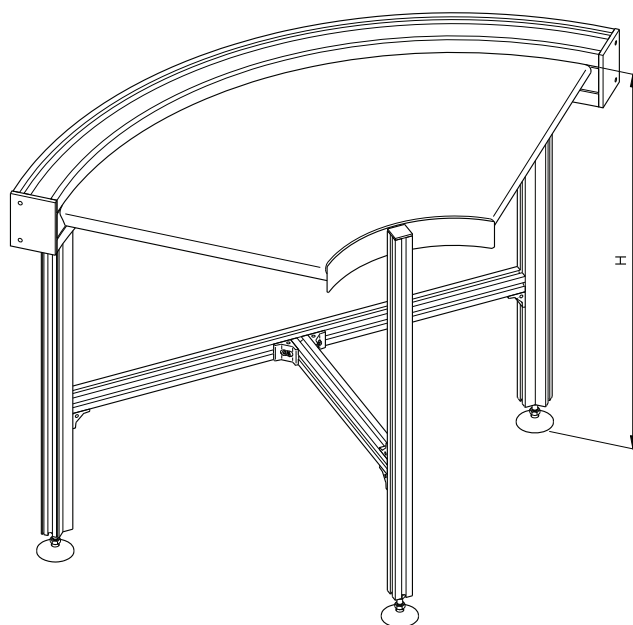

Radius Versions curve 90°

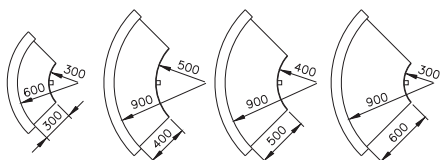

Radius Versions curve 180°

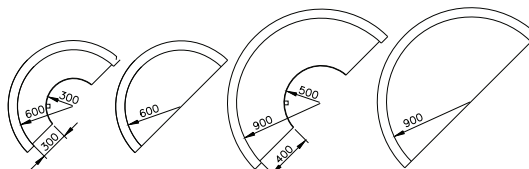

## Order Example

In order to properly quote and manufacture your conveyor we require the following information:

KGF-P 2040

Version Ra 900 / Ri 500

Speed 15 m/min

Usable Width B = 400 mm


Belt type

Stands with (or without)  
belt change support

Height H = 800 mm

## Stands

standard



with belt change support

