

FIXED FEMALE CONNECTOR

MATERIAL:

(2-3) Duroplast.

Oils and greases resistant.

High temperatures resistant.

SURFACE:

Glossy.

COLOUR:


Black (RAL 9011).

MAIN INSERTS:

- (1) Threaded brass insert with slot.
- (4) F25-00 Toothed washer in black-oxide treated steel DIN 6798.
- F35-50 Corrugated washer in black-oxide treated steel DIN 137.
- F70-95 Corrugated washer in black-oxide treated steel DIN 137.
- (5) Threaded hexagonal ring in yellow passivated steel.
- (6) Split washer in black-oxide treated steel UNI 1751.
- (7) Yellow passivated steel washer.
- (8) Hexagonal head screw in yellow passivated steel DIN 933/UNI 5739.

SPECIAL REQUESTS:

- None.

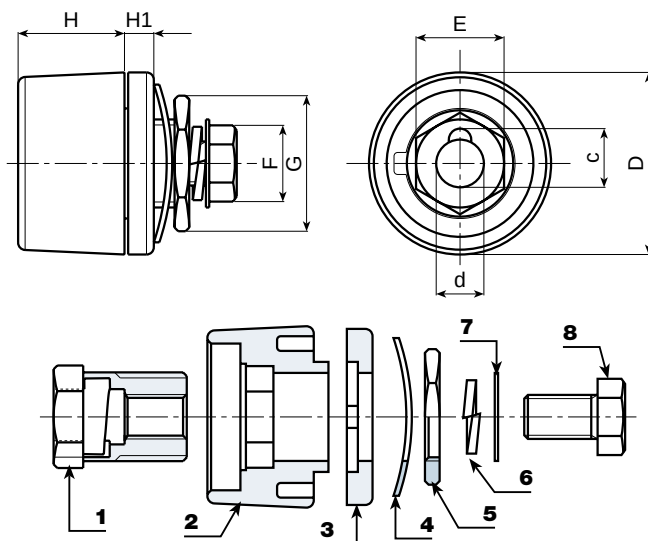

S111 + S112



S113 + S114



S112 + S113



Art.	D	H	H1	d	c	E	F	G	Weight (gr)
S111-F25-00	33	14	4	9	11	14	13	22	50
S111-F35-50	50,5	29	7	13	16	21	17	27	153
S111-F70-95	50,5	29	7	13	16	24	19	32	202



MALE TRAILING CORD CONNECTOR

MATERIAL:

(4) Thermoplastic rubber 75-80 Shore.

SURFACE:

Satin.

COLOUR:


Black (RAL 9011).

MAIN INSERTS:

- (1) Insert with male element in brass.
- (2) Tube in soft copper.
- (3) Dowel with countersunk hexagon DIN 913-45H. (n°2 dowels for the M90-00version).

SPECIAL REQUESTS:

- None.

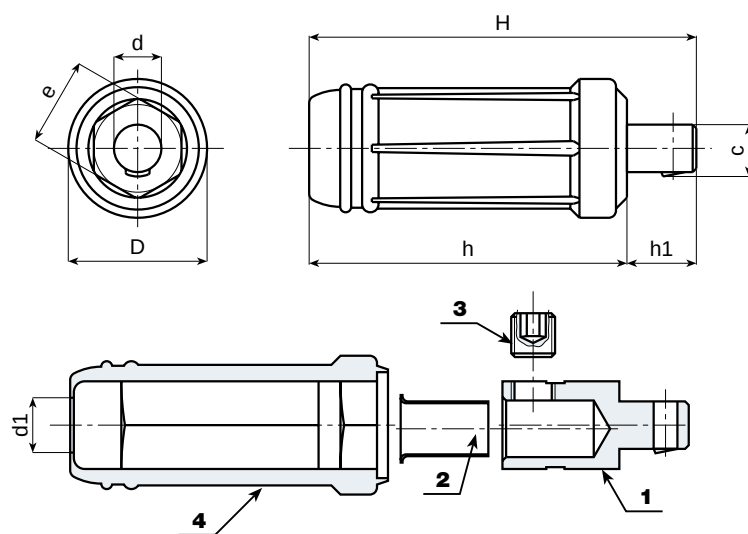

S111 + S112



S113 + S114



S112 + S113



Art.	D	H	h	h1	d	c	e	d1	Weight (gr)
S112-M25-00	24,5	70	59	11	9	10	14	8,5	37
S112-M35-50	35	106	87	19	13	14,5	21	11	130
S112-M70-00	38	106	87	19	13	14,5	24	15,5	148
S112-M95-00	38	106	87	19	13	14,5	24	15,5	200



ART. S113

FEMALE TRAILING CORD CONNECTOR

MATERIAL:

(4) Thermoplastic rubber 75-80 Shore.

SURFACE:

Satin.

COLOUR:

Black (RAL 9011).

MAIN INSERTS:

- (1) Insert with a female slot in brass.
- (2) Tube in soft copper.
- (3) Dowel with countersunk hexagon DIN 913-45H. (n°2 dowels for the F95-00version).

SPECIAL REQUESTS:

- None.




S111 + S112



S113 + S114



S112 + S113

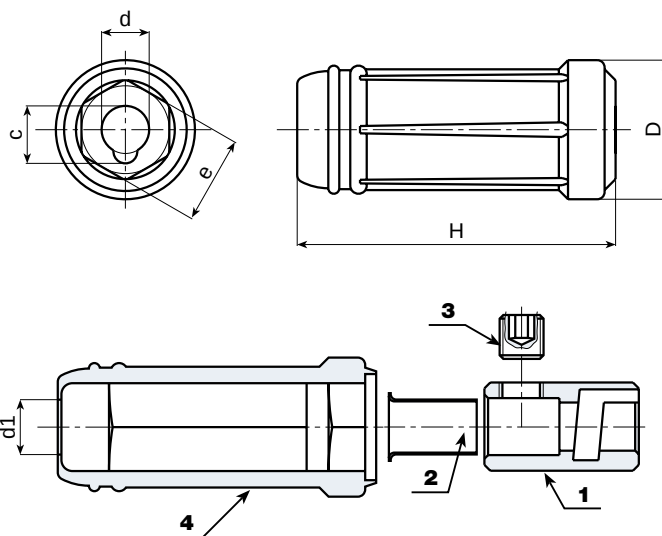

Art.	D	H	d	c	e	d1	Weight (gr)
S113-F25-00	24,5	59	9	10,5	14	8,5	38
S113-F35-00	35	87	13	16	21	11	104
S113-F70-00	38	87	13	16,5	24	15,5	151
S113-F95-00	38	87	13	16	24	15,5	188



BOTECA

FIXED MALE CONNECTOR

MATERIAL:

(2-3) Duroplast.
Oils and greases resistant.
High temperatures resistant.

SURFACE:

Glossy.

COLOUR:


Black (RAL 9011).

MAIN INSERTS:

- (1) Threaded Insert with male element in brass.
- (4) F25-00 Toothed washer in black-oxide treated steel DIN 6798.
- F35-50 Corrugated washer in black-oxide treated steel DIN 137.
- F70-95 Corrugated washer in black-oxide treated steel DIN 137.
- (5) Threaded hexagonal ring in yellow passivated steel.
- (6) Split washer in black-oxide treated steel UNI 1751.
- (7) Yellow passivated steel washer.
- (8) Hexagonal head screw in yellow passivated steel DIN 933/UNI 5739.

SPECIAL REQUESTS:

- None.

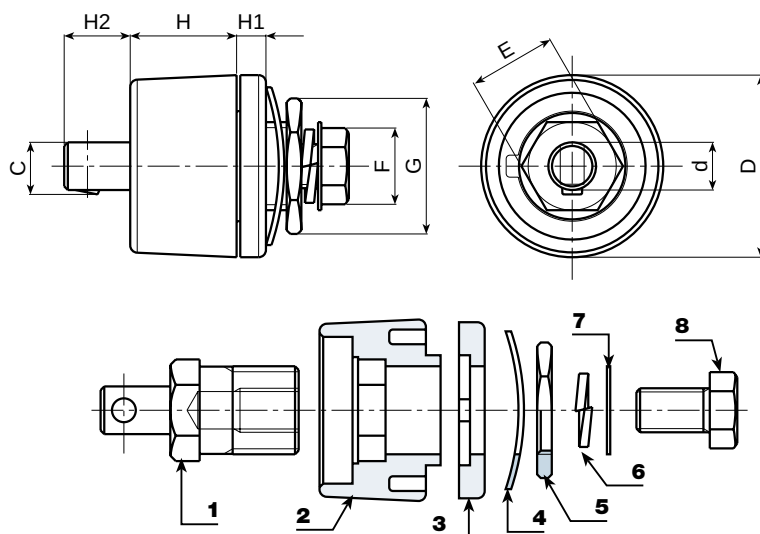

S111 + S112



S113 + S114



S112 + S113



Art.	D	H	H1	H2	d	c	E	F	G	Weight (gr)
S114-F25-00	33	14	4	7	9	9,5	14	13	22	60
S114-F35-50	50,5	29	7	9	13	14	21	17	27	194
S114-F70-95	50,5	29	7	9	13	14	24	19	32	242



FIXED FEMALE CONNECTOR TP

MATERIAL:

(2-3) Reinforced polyamide.
Oils and greases resistant.

SURFACE:

Satin.

COLOUR:

Black (RAL 9011).

MAIN INSERTS:


- (1) Threaded brass insert with slot.
- (4) F35-50 Corrugated washer in black-oxide treated steel DIN 137.
- (5) Threaded hexagonal ring in yellow passivated steel.
- (6) Split washer in black-oxide treated steel UNI 1751.
- (7) Yellow passivated steel washer.
- (8) Hexagonal head screw in yellow passivated steel DIN 933/UNI 5739.

SPECIAL REQUESTS:

- None.



S117 + S112

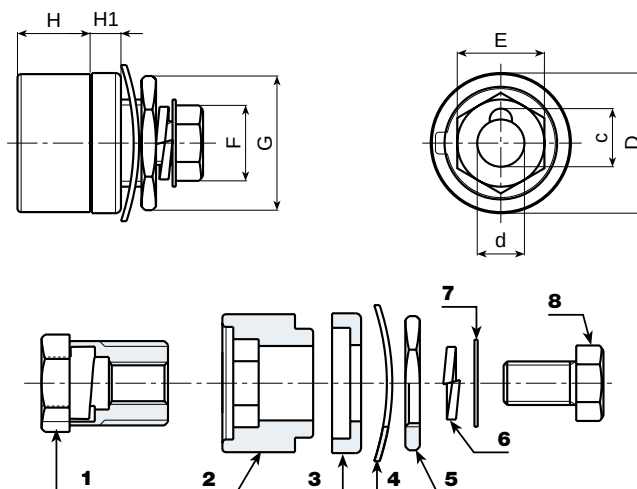

Art.	D	H	H1	d	c	E	F	G	Weight (gr)
S117-F35-50	38	20	8	13	16	21	17	27	121



FIXED MALE CONNECTOR TP

MATERIAL:

(2-3) Reinforced polyamide.
Oils and greases resistant.

SURFACE:

Satin.

COLOUR:


Black (RAL 9011).

MAIN INSERTS:

- (1) Threaded Insert with male element in brass.
- (4) F35-50 Corrugated washer in black-oxide treated steel DIN 137.
- (5) Threaded hexagonal ring in yellow passivated steel.
- (6) Split washer in black-oxide treated steel UNI 1751.
- (7) Yellow passivated steel washer.
- (8) Hexagonal head screw in yellow passivated steel DIN 933/UNI 5739.

SPECIAL REQUESTS:

- None.

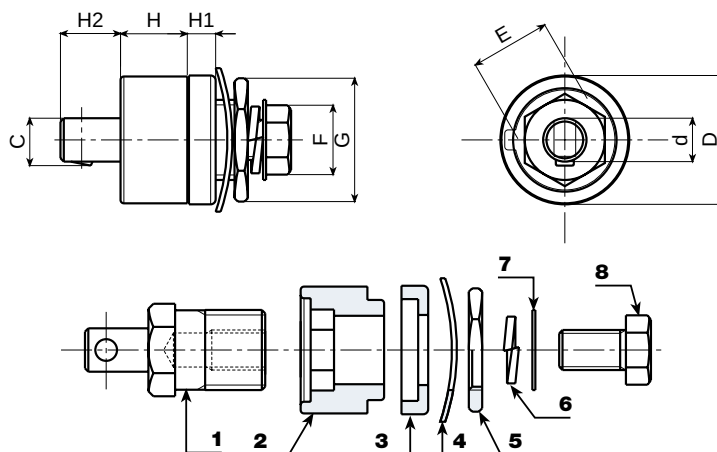

Art.	D	H	H1	H2	d	c	E	F	G	Weight (gr)
S118-F35-50	38	20	8	17	13	14	21	17	27	160



ART. S228

SHORT-NECK WASHER PAIR

MATERIAL:

Reinforced polyamide.
Oils and greases resistant.

SURFACE:


Satin.

COLOUR:

Black (RAL 9011).

SPECIAL REQUESTS:

- None.

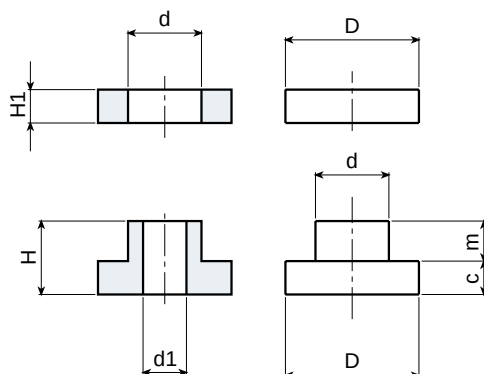

Art.	D	H	d	H1	m	c	d1	Weight (gr)
S228-20C	20	11	11	5	6,5	4,5	6,5	9

ART. S229

INSULATING WASHER PAIR

MATERIAL:

Reinforced polyamide.
Oils and greases resistant.

SURFACE:


Satin.

COLOUR:

Black (RAL 9011).

SPECIAL REQUESTS:

- None.

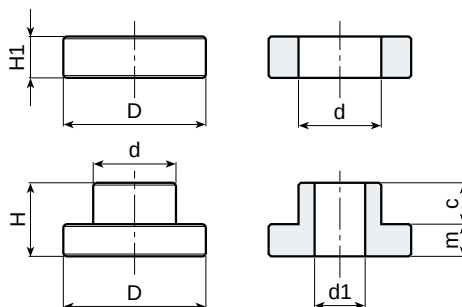

Art.	D	H	d	H1	m	c	d1	Weight (gr)
S228-20C	20	11	11	5	4,5	6,5	6,5	9



BOTECA

ART. S228

SHORT-NECK WASHER PAIR

MATERIAL:

Reinforced polyamide.
Oils and greases resistant.

SURFACE:


Satin.

COLOUR:

Black (RAL 9011).

SPECIAL REQUESTS:

- None.

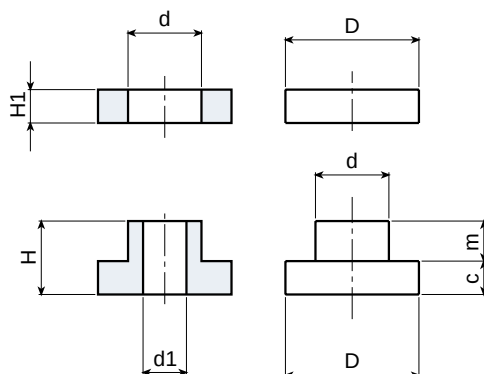

Art.	D	H	d	H1	m	c	d1	Weight (gr)
S228-20C	20	11	11	5	6,5	4,5	6,5	9

ART. S229

INSULATING WASHER PAIR

MATERIAL:

Reinforced polyamide.
Oils and greases resistant.

SURFACE:


Satin.

COLOUR:

Black (RAL 9011).

SPECIAL REQUESTS:

- None.

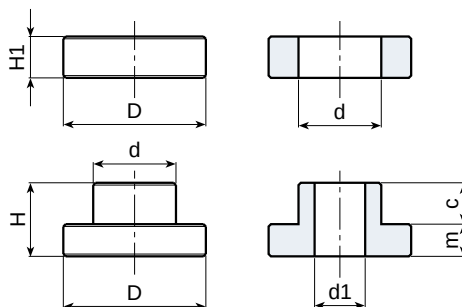

Art.	D	H	d	H1	m	c	d1	Weight (gr)
S228-20C	20	11	11	5	4,5	6,5	6,5	9



BOTECA

ART. S230

INSULATING WASHER PAIR

MATERIAL:

Duroplast.
Oils and greases resistant.
High temperatures resistant.

SURFACE:


Glossy.

COLOUR:

Black (RAL 9011).

SPECIAL REQUESTS:

- None.

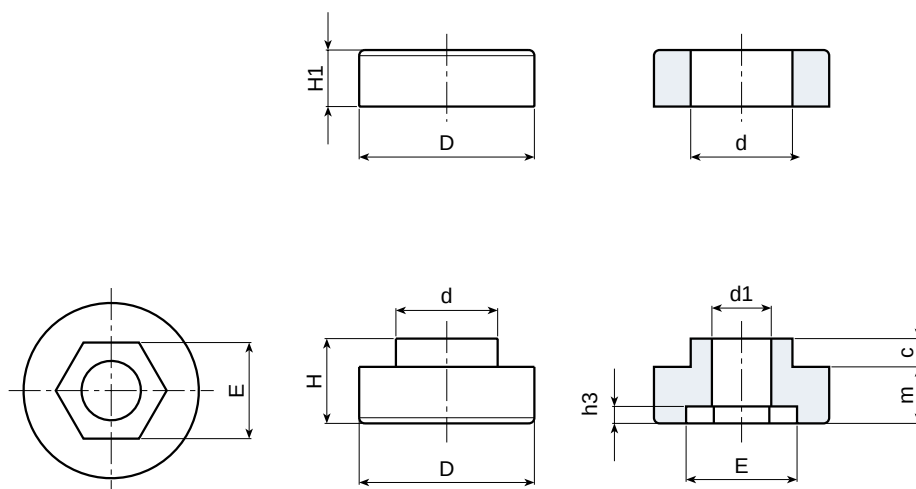

Art.	D	d	H	H1	c	m	E	h3	d1	Weight (gr)
230-20C	20	11	12	5	4	8	10	3	6,5	8
230-31 BG8	31	18	15	10	5	10	13	3	9	22
230-31 BG10	31	18	15	10	5	10	17	3	11,5	18
230-31 BG12	31	18	15	10	5	10	19	3	13	15
230-38C	35	22	18	10	5	12	22	5	14,5	24



BOTECA

ART. S231

INSULATING WASHER PAIR WITH SCALLOP CLAMPING KNOB

MATERIAL:

Duroplast.
Oils and greases resistant.
High temperatures resistant.

SURFACE:


Glossy.

COLOUR:

Black (RAL 9011).

SPECIAL REQUESTS:

- None.

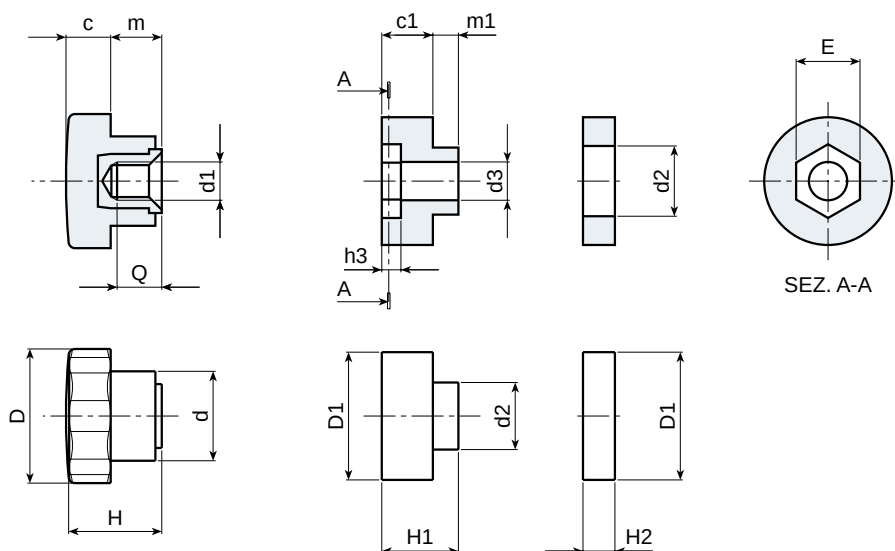

Art.	D	D1	d	d1	d2	d3	c	m	c1	m1	H	H1	H2	h3	E	Q	Weight (gr)
S231-20	22	20	14	M6	11	6	7	8	8	4	15	12	5	3	10	7	13



BOTECA

ART. S599

PANEL CABLE CLAMP

MATERIAL:

Polyamide.
Oils and greases resistant.

SURFACE:


Satin.

COLOUR:

Black (RAL 9011).

SPECIAL REQUESTS:

- None.

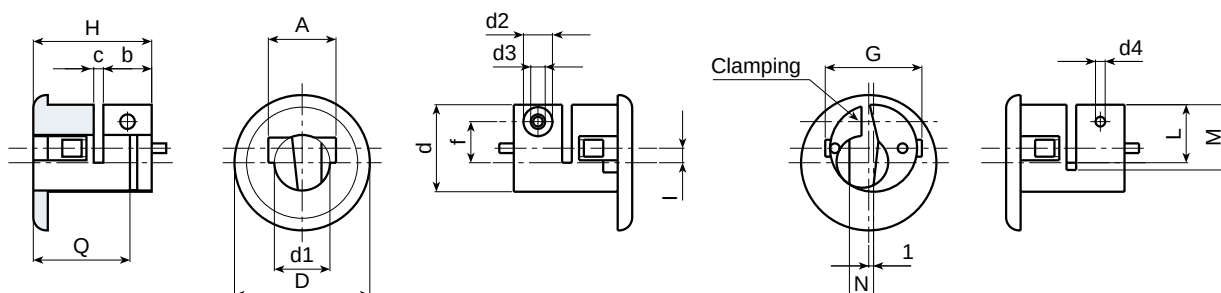

Art.	D	H	d	d1	d2	d3	d4	A	b	c	f	G	I	L	M	N	Q	Weight (gr)
S599	28	25	18	11,5	6	3	2	14	10	2	8,5	20	3	12	15	5	13	4,5



BOTECA

CABLE CLAMP WITH HEXAGONAL RING

MATERIAL:

Reinforced polyamide.
Oils and greases resistant.

SURFACE:

Satin.

COLOUR:


Black (RAL 9011).

HOLE :

Smooth right through hole obtained by moulding the plastic.

SPECIAL REQUESTS:

- None.

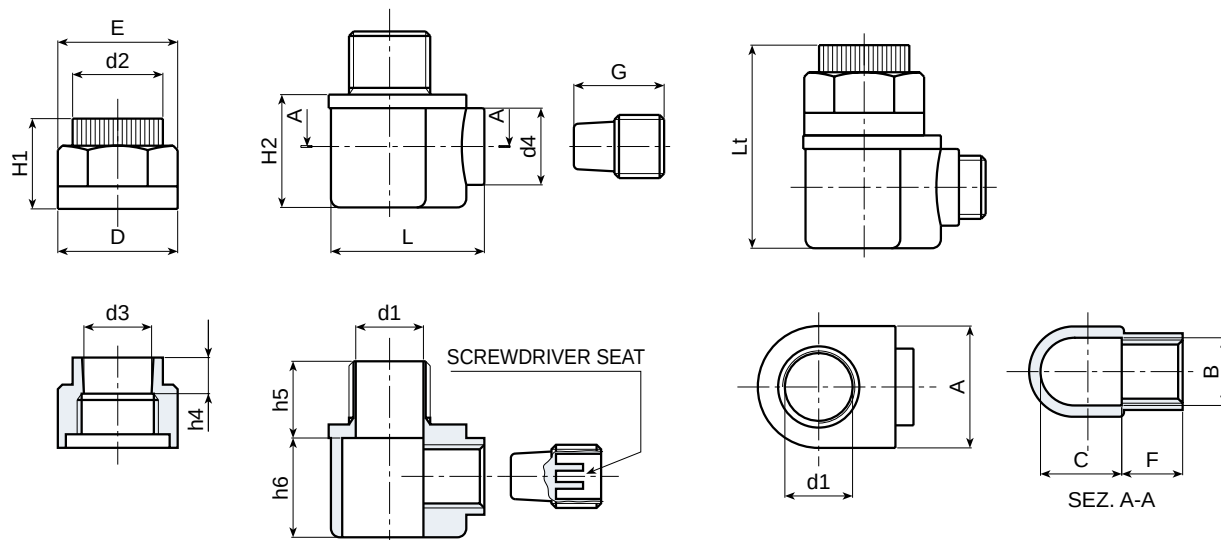

Art.	A	B	C	D	E	F	G	L	H1	H2	h4	h5	h6	d1	d2	d3	d4	Lt.	Weight (gr)
S600-38	27	M14	17,5	26	23	14,5	19	34,5	20	22	7	16,5	19	14,5	19	14	17	43	13



ART. S601

DUMPER PLUG (FOOT)


MATERIAL:
Polyethylene.

SURFACE:
Satin.

COLOUR:
Black (RAL 9011).

SPECIAL REQUESTS:

- None.

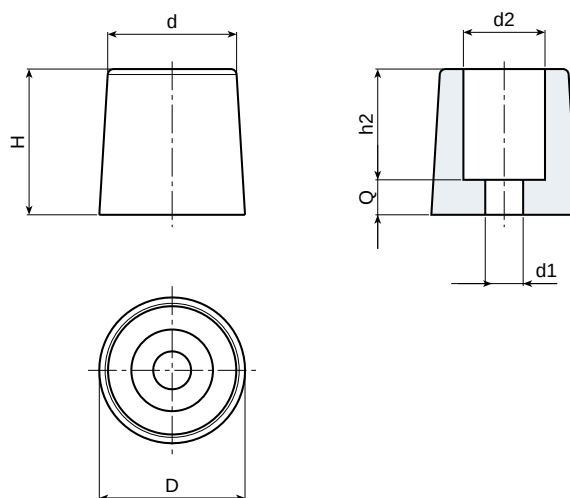

Art.	D	H	d	d2	h2	Q	d1	Weight (gr)
S601-22	23	17,5	21	11	8	9,5	4	13
S601-25	25	25	22	14	19	6,5	6,5	17



BOTECA

ART. S603

SLOT-ON REEL HOLDER

MATERIAL:

(1-2) Reinforced polyamide.
Oils and greases resistant.

SURFACE:

Satin.

COLOUR:


Black (RAL 9011).

MAIN INSERTS:

- (3-8) Left hand threaded zinc plated steel nut.
- (4) Zinc plated steel washer.
- (5-7) Spring washer in black-oxide treated steel.
- (6) Threaded insert in zinc plated steel.

SPECIAL REQUESTS:

- None.

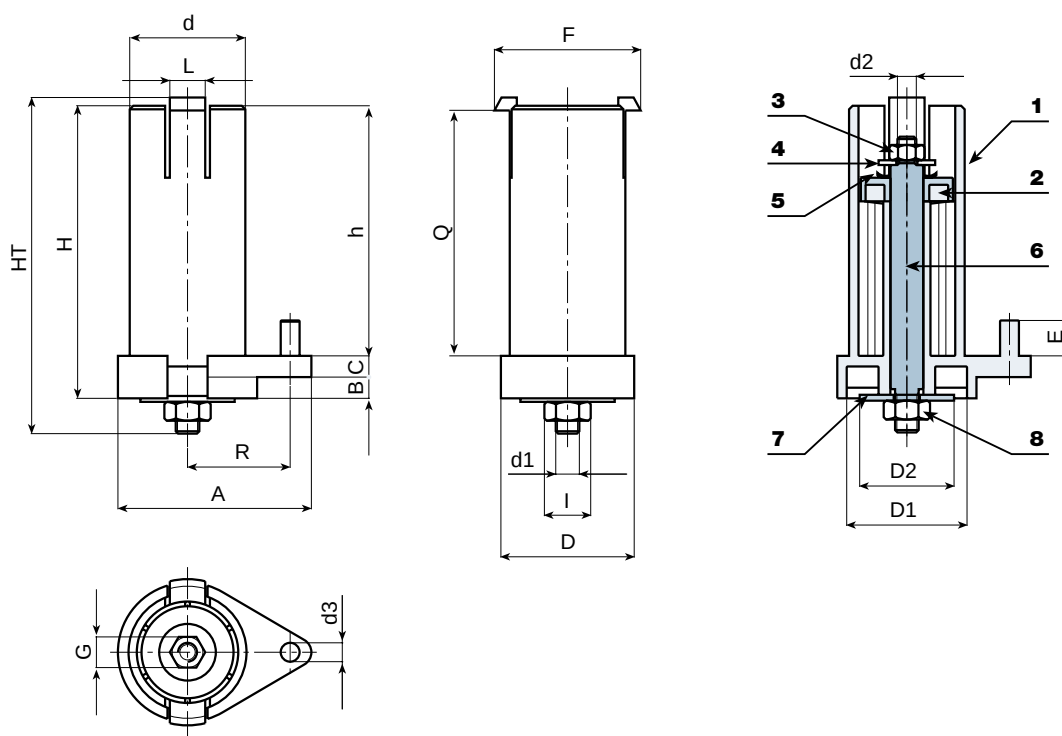

Art.	D	D1	D2	HT	H	d	d1	d2	d3	h	A	B	C	E	F	G	I	L	Q	R	Weight (gr)
S603-118	60	51	40	137	118	50	M10 SX	M8 SX	8	107	82	3	9	15	63	13	17	15	104	43,5	295
S603-124	60	51	40	145	124	50	M10 SX	M8 SX	8	107	82	9	9	15	63	13	17	15	104	43,5	315



BOTECA

ART. S802 - S818

CARRIAGE SUPPORT

MATERIAL:

Reinforced polyamide.
Oils and greases resistant.

SURFACE:


Satin.

COLOUR:

Black (RAL 9011).

SPECIAL REQUESTS:

- None.

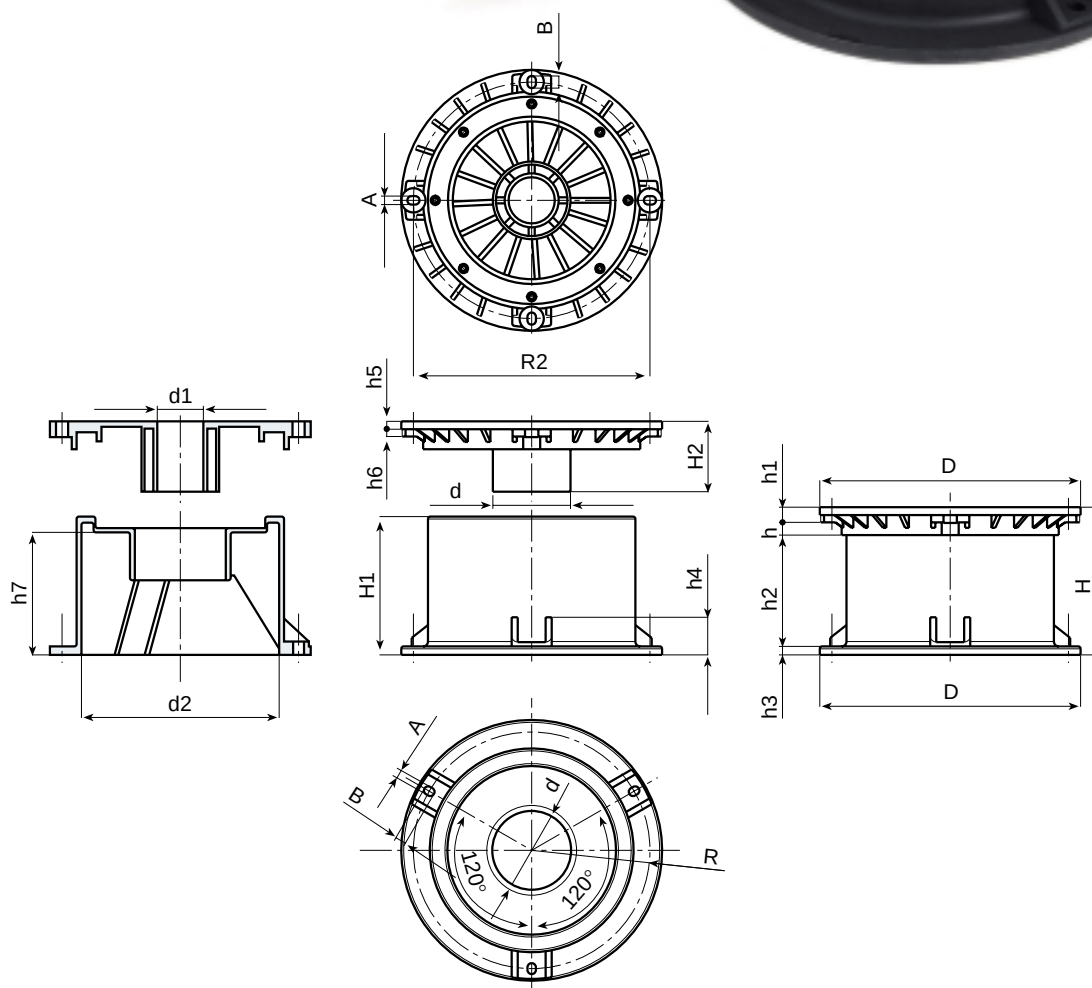

Art.	D	H	H1	H2	d	d1	d2	h	h1	h2	h3	h4	h5	h6	h7	R	R1	A	B	Weight (gr)
S818	215	65	56	58	64	35	162	13	10	36	6,5	31	7	6	100	195	195	7	9	1000
S802	215	122	114	58	64	38	162	13	10	93	6,5	31	7	6	100	195	195	7	9	1200



BOTECA

ART. S860

FRONT TORCH CONNECTOR GUARD

MATERIAL:

Reinforced polyamide.
Oils and greases resistant.

SURFACE:

Satin.

COLOUR:


Black (RAL 9011).

HOLE :

Smooth right through hole obtained by moulding the plastic.

SPECIAL REQUESTS:

- None.

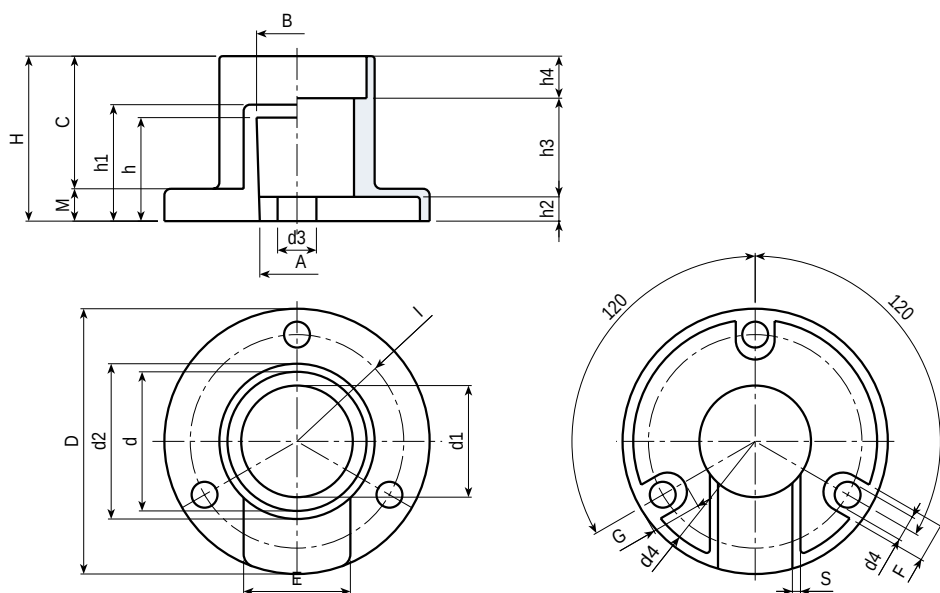

Art.	D	H	A	B	C	E	F	G	I	M	S	h	h1	h2	h3	h4	d	d1	d2	d3	d4	Weight (gr)
S860	82	51	23	25	41	34,5	12	15,5	33	10	2,5	32	36	7,5	30,5	13	43	34,5	50	12	8	65



BOTECA